

Packaging - Specification
container for transport


SCHÜTZ

**ECOBULK (R)LX 1000 UN / DN150 closed /
int. butterfly-valve, PP-g. /
2 label plates / Compositepallet**

SCHÜTZ GmbH & Co.KG&A
Schützstraße 12
D 56242 Selters / Germany

Date: 09.01.2013 / TE-KO / ck
Page 1 from 2

Article - No.: 4027028 (New) 4027029 (Reco)

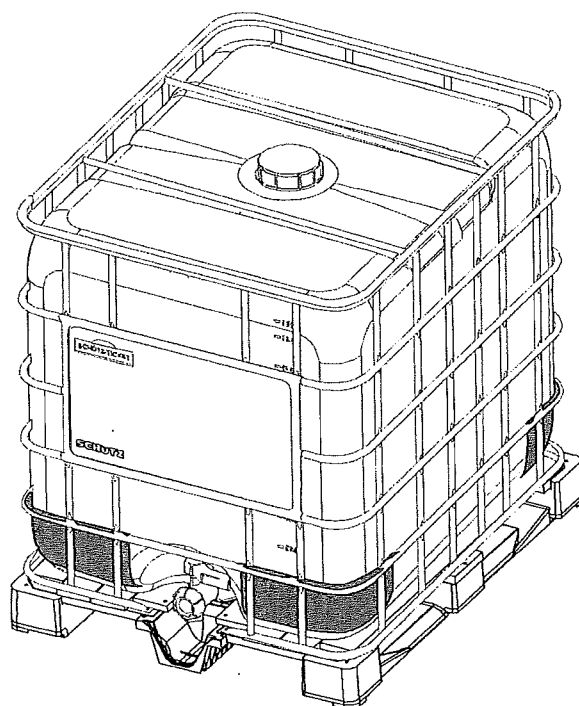

Technical data:

Nominal Capacity:	1000	Litre
Brimful Capacity:	1060	Litre
Length:	1200	mm
Width:	1000	mm
Height with pallet:	1160	mm
Filling opening:	150	mm
Fork opening:	95	mm
Label plate:	2	piece
Corner Protector:	4	piece
Weight:	Inner container:	15,5 kg
	Total approx:	60,0 kg

Technical subjects to change, all dimensions approximately

Packaging - Specification
container for transport

SCHÜTZ

**ECOBULK (R)LX 1000 UN / DN150 closed /
int. butterfly-valve, PP-g. /
2 label plates / Compositepallet**

**SCHÜTZ GmbH & Co.KG&A
Schützstraße 12
D 56242 Selters / Germany**

**Date: 09.01.2013 / TE-KO / ck
Page 2 from 2**

Article - No.: 4027028 (New) 4027029 (Reco)

Construction:

Outer Container: Rectangular grid box made of tubular Steel material, connected on top with tie-bar, extra large label plate with Schütz-Ticket on front side, additional extra large label plate on the back side.
Material: Grid / Bottom plate: Steel, galvanized
Corner Protector: 4 pieces made of PE-HD, black

Inner Container: Rectangular blow molded tank of high density polyethylene, with filling opening in the middle of the top section. Discharge opening at the bottom of the front side.
Material: PE-HD, natural

Filling Opening: DN150 with external thread, closed with screw cap and gasket.
Material: Screw cap DN150: PE-HD, red
O-ring gasket: TPE

Discharge Opening: Intergrated butterfly-valve DN50 with blue handle. Outlet sealed with PE-lined Alu-film. Valve closed with screw cap, PE-disk and flat-gasket. Outlet nozzle enclosed.
Material: Butterfly-valve housing: PE-HD, natural
Flap-gasket: PP
Screw cap DN50: PE-HD, black
Flat-gasket screw cap: PE, foam
PE-disk: PE-HD, red
Outlet nozzle: PE-HD, natural

Pallet: Composite-skidpallet (1000 x 1200 mm), 4-way entry
Material: Foot: PE-Recyclat
Bottom-skid: Wood => Heat treatment

Heavy metals: Concentration level of heavy metals (Pb, Cd, Cr VI and Hg) in packaging does not exceed 100ppm

Delivery: Ready for filling

UN-Marking: UN 31HA1/Y .../ BAM12033

Speciality Reco: All parts which have contact with filling product are replaced by new once, for example inner tank, screw cap, valve and label plate.
Grid, pallet and the metal cladding may show marks from the prior use!

Technical subjects to change, all dimensions approximately