


Filling level indication ltr./US.liq.gal

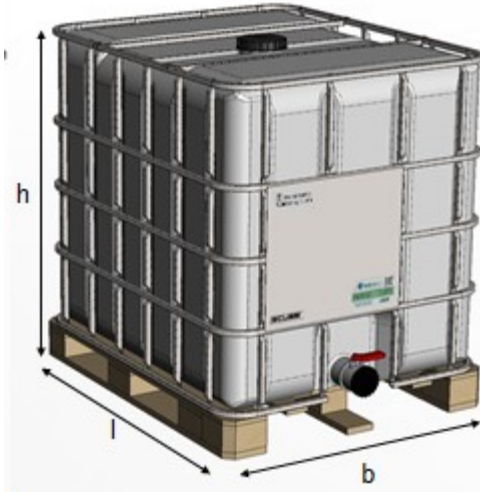

**Greif code** IBIB00239GQB0019

**customer** Delamine BV

**customer article #** 5406530

**External dimensions targets (mm):**

length (l)	width (b)	height (h)
1200	1000	1165

Weight (kg)	54	+7/-3 %
-------------	----	---------

brimful volume (ca ltr.)	1060
--------------------------	------

**Food contact conformity**

n.a.

n.a.

**Eligible for Zone area** 2 (IEC TS 60079-32-1)

### Materials and Structural Equipment

**Cage** tubular steel 18x18mm, galvanized, welded

**Pallet** wooden skid pallet, IPPC/ISPM 15, nailed

**Inner receptacle** blowmolded

**Resin** HDPE UV stab.

**Weight** 14,5+0,5 kg

**Color** nature colored

### Openings and closures

**Top closure** Screw cap from PE-HD black DN150 for automatic filling

**Cap gasket** TPE-S venting  n.a.

**2" closure**  n.a.

**Plug washer** n.a.

**Torques** cap/plug ca

**Discharge Opening** DN50

**Valve** butterfly valve, PE-HD nature, complete

**color handle**

red

**Flange gasket** welded

**Flap seal** PE-HD

**connection** S60x6

**outlet nozzle**

#### Label plates

Front 470x770

Left

Right

Back 470x770

### UN approval

UN31HA1/Y/./NL/TCPI-GEFNL03-150588/4066/1696

max. stacking load (kg): resting 4066 Transport 2258

**stickers** Earthminded Collection

All components with product contact are free of recycled polymers.

**Remarks** Torque DN150 lid: 60-80Nm

**Date of creation** 29-12-2020

**Author** Bühler, Bas

**Status released**

**Previous version** 30-6-2020

+31 20 7247337

bas.buehler@greif.com