

# Packaging - Specification ECOBULK


# SCHÜTZ

Transportcontainer ECOBULK 1000 ltr.  
LX1000 UN Nat/150R TP  
Bfly 50 00 Met 3PCS/Compositop.  
2-Pit XXL:XXL/TI

Schütz (Benelux) B.V.  
Westelijke Randweg 23  
4791RT KLUNDERT  
NETHERLANDS

**Article-No.** 4029822

Date Aug 7, 2018  
Page 1 / 3

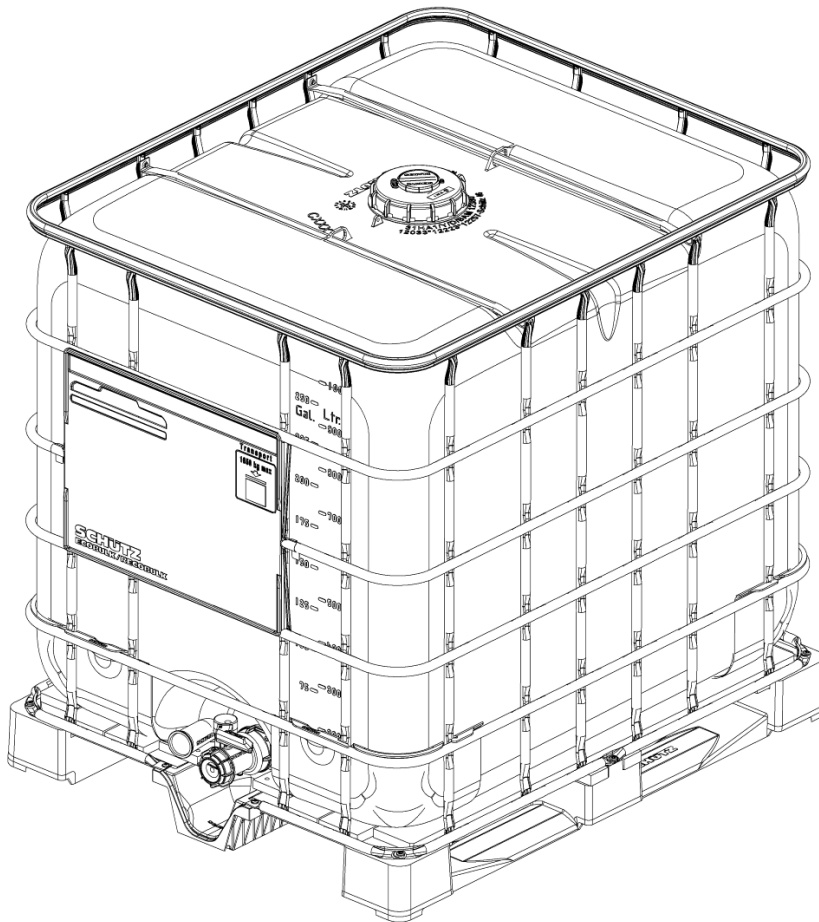

This picture is for illustration purpose only and does not necessarily correspond to the specified product.

## Weights and measures

Nominal Capacity	1.000 Liter
Brimful Capacity	1.060 Liter
Length	1.200 mm
Width	1.000 mm
Height with pallet	1.165 mm
Total weight approx	59,5 kg

## Pallet

Pallet type	Composite pallet
Opening height	Top layer wood, skids plastic recycle min. 90mm, 4-way entry

# Packaging - Specification ECOBULK

# SCHÜTZ

Transportcontainer ECOBULK 1000 ltr.  
LX1000 UN Nat/150R TP  
Bfly 50 00 Met 3PCS/Compositop.  
2-Plt XXL:XXL/TI



Schütz (Benelux) B.V.  
Westelijke Randweg 23  
4791RT KLUNDERT  
NETHERLANDS

**Article-No.** 4029822

Date Aug 7, 2018  
Page 2 / 3

## Outer container

Grid	Steel, galvanized
Corner protector	black
Label plate	XXL - 12 field, with Schütz-Ticket
additional label plate	back side XXL - 12 field

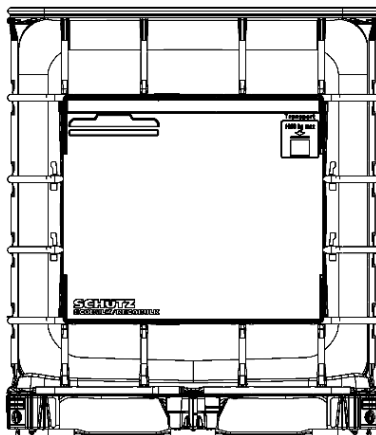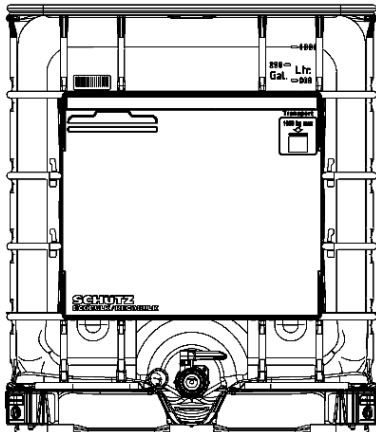


## Inner container

Rectangular blow molded tank of high density polyethylene  
Container PE-HD, natural

## Filling opening

Screw cap	DN150 / 6", PE-HD, red
O-ring gasket	TPE



Plug

without Plug

# Packaging - Specification ECOBULK

# SCHÜTZ

Transportcontainer ECOBULK 1000 ltr.  
LX1000 UN Nat/150R TP  
Bfly 50 00 Met 3PCS/Compositop.  
2-Plt XXL:XXL/TI


Schütz (Benelux) B.V.  
Westelijke Randweg 23  
4791RT KLUNDERT  
NETHERLANDS

**Article-No.** 4029822

Date Aug 7, 2018  
Page 3 / 3

## Discharge opening

Outlet valve	integr.butterfly-valve DN50/2"
Case	PE-HD
Connection thread	metric
Flap gasket / Ball gasket	PP
Handle color	blue, Handle protection
Screw cap	PE-HD
Screw cap gasket	PE, foamed
Screw cap color	black
Outlet nozzle	PE-HD, packed

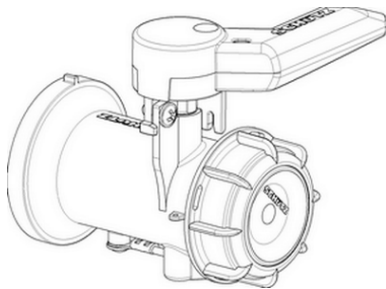

## Features

### UN-Marking

UN\_31HA1/Y/mm yy/D/BAM14978-Schütz#/3102/1723/1060I/62kg/100kPa

### Heavy metals

Concentration level of heavy metals (Pb, Cd, Cr VI and Hg) in packaging does not exceed 100 ppm

### Delivery

Ready for filling. The customer or filler is responsible for testing the material compability of the filling material with the packaging

### User information:

By implementing and continually improving extensive preventive programmes, SCHÜTZ strives towards minimising the potential contamination risk for filling material in line with the current state of the art and in accordance with recognised and applicable quality and system standards. In industrial manufacturing, however, the possibility of particles arising cannot be fundamentally and entirely eliminated. Specifically for plastic and steel packaging, unavoidable friction during opening and closing as well as static charging of the packaging contribute to the development of particles and/or the possibility of particles being attracted. Such particles can then also invariably penetrate the packaging interior. With the goal of minimising the risk of particle formation and transmission into packaging, users are recommended – particularly during further processing – to keep packaging closed wherever possible and to keep the number of opening and closing procedures as low as possible. In the case of sensitive filling materials or filling material applications (e.g. for food/pharmaceutical products, paint or electro-chemicals), it is also recommended that the filling material is filtered on removal or prior to further processing.

SCHÜTZ reserves the right to change the construction, technology, design and material of the product or individual components without notice. The dimensions and weights given here are approximate and can vary according to the configuration of the individual components. For other product details and operating information concerning the correct handling of our packaging, please consult our Handling Guide.