



Packaging Data Sheet

UN 31HA1


composite IBC

1000 L

GCube IBC Elektron

Greif Packaging Plastics Germany GmbH

Filling level indication ltr./US.liq.gal

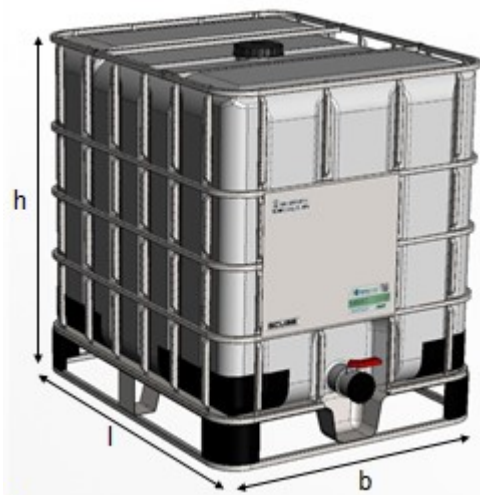

Greif code IBIB00045GQB0046

customer Delamine BV

customer article # 5406531

External dimensions targets (mm):

length (l)	width (b)	height (h)
1200	1000	1157

Weight (kg) 56 +/- 3 %

brimful volume (ca ltr.) 1060

Food contact conformity

n.a.

Eligible for Zone area 1+2 (IEC TS 60079-32-1)

Materials and Structural Equipment

Cage tubular steel 18x18mm, galvanized, welded

Pallet composite frame/galvanized steel-PE/base pan 4 corner protectors, PE-HD, black

Inner receptacle blowmolded **Resin** Coex HDPE UV stab. antistat.

Weight 15,5+2,5 kg **Color** nature colored

Openings and closures

Top closure Screw cap from PE-HD black DN150 for automatic filling

Cap gasket TPE-S venting n.a.

2" closure n.a. **Plug washer** n.a.

Torques cap/plug ca

Discharge Opening DN50 **Valve** butterfly valve, PE-HD conduct., earthwire, compl. **color handle** red

Flange gasket welded **Flap seal** PE-HD

connection S60x6 **outlet nozzle**

Label plates

Front 470x770

Left

Right

Back 470x770

UN approval(s)

UN31HA1/Y/./NL/TCPI-GEF5/FPD2-170613/3080/1711

UN31HA1/Y/./NL/TCPI-GEF5/FPD2-170576/3080/1711

max. stacking load (kg): resting 3080 Transport 1711

stickers Earthminded Collection, Ü-TRbF 20, Safety Instructions IEC/TRGS727

All components with product contact are free of recycled polymers.

Remarks Torque DN150 lid: 60-80Nm

Date of creation 29-12-2020

Author Bühler, Bas

Status released

Previous version 8-7-2020

+31 20 7247337

bas.buehler@greif.com